



3PC Flanged Ball Valve ANSI Standard

CENTROFLOW 3PC Flanged Ball Valve ANSI Standard is made specially for pharmaceutical and chemical industry use. We sell at low cost with high quality, customized solutions and 3 years guarantee. After all, we offer customers' concerning :on time delivery and small order or sample order are acceptable. For more details, contact CentroFlow's working team, we are pleased to serve you all clock round.

Product Description

China Supplier CENTROFLOW export 3PC Flanged Ball Valve ANSI Standard is of investment casting. It is consist of three parts of the body. The top flange of the valve can be adapt to manual , worm gear , pneumatic and electric actuators. Is a kind type of valve that easy to install, replace, and maintenance. CentroFlow's experienced and skilled workers make the products more quality and remarkable. Product conform to API DIN JIS BS standard. Besides customized specification are also welcome.

CENTROFLOW 3PC Flanged Ball Valve ANSI Standard Features

- Full port, 1/2"~4" (DN15~DN100)
- Body W.P. : 1000 WOG (PN63)
- Flange End W.P. : PN40
- W.T. : -20°C~200°C (-4°F~392°F) -
- Investment casting
- Blow-out proof stem
- Anti-static device (option)
- Locking device
- ISO 5211 Mounting pad
- Flange dimension: DIN 2501 - PN40
- Face to face: DIN 3202 - F1



Material and Main Parts


NO	Part Name	Material	
1	Body	ASTM A351-CF8M	ASTM A216-WCB
2	Cap		
3	Ball	ASTM A351-CF8M	
4	Stem	SS304/SS316	
5	Gland Nut	SS304	
6	Seat	PTFE/RTFE	
7	Seal	PTFE	
8	Packing	PTFE	
9	Trust Washer	PTFE	
10	Spring Washer	SS304	
11	Stem Nut	SS304	
12	Bolt	SS304	
13	Nut	SS304	
14	Spring Washer	SS304	
15	Handle	STAINLESS STEEL	
16	Locking Device	STAINLESS STEEL	

Zhejiang Centro Flow Control Co., Ltd.

+86-577-85989708

E-mail:centro@centro-flowcontrol.com

17	Handle Sleeve	PVC
----	---------------	-----

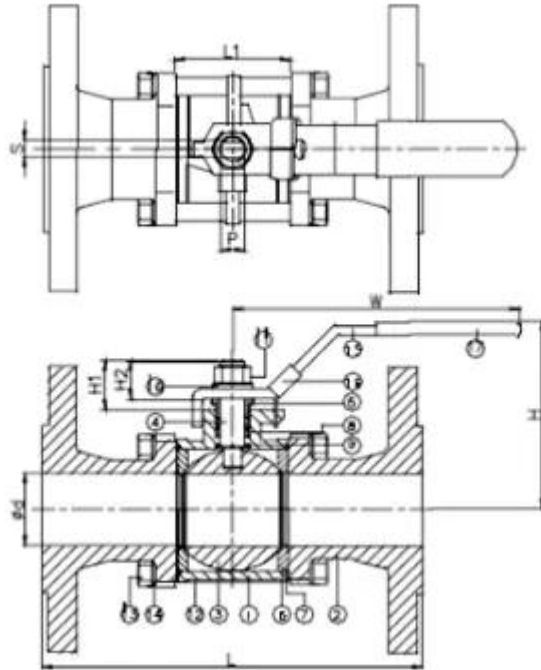

Dimensions

DN	d	L	L1	H	H1	H2	W	S	P
15	15	130	24	83	16.2	10.5	152	5	5/16"W
20	20	150	28	92	20.7	13.5	152	6.5	3/8"W
25	25	160	35	86	24.7	15.5	182	8	7/16"W
32	32	180	45	91	21.7	15.5	182	8	7/16"W
40	38	200	55	112	26.7	17.5	214	9	1/2"W
50	50	230	66	115	26.7	17.5	214	9	1/2"W
65	65	290	86	172	42.2	33	314	12	3/4"W
80	80	310	100	188	40.2	33	314	12	3/4"W
100	100	350	125	207	56	42	339	12	1"W