



Gost Standard Gate Valve

Overview of CENTROFLOW made Gost Standard Gate Valve Bolted Bonnet Gate Valves are casted full bore valve with flexible wedge and external screw suitable for regulation manufactured according to GOST standard. There're two choices: with rising stem and non-rising stem.

Product Description

CENTROFLOW Manufactured Gost Standard Gate Valve design specifications:

Size: from 2" to 20"

Pressure: PN6 – PN160

Material: WCB, LCB, WC6, WC9, C12, C5, CF8, CF3, CF3M, and CF8M Design Standard: GOST5762-2002

Distance between flanges: GOST3706-93

Connectinons: GOST12815-80

Test standard: GOST356-80

Actuation: Handwheel, gear box, pneumatic or electric actuator with handwheel for emergencies

Medium: steam, oil, gas, petrol products, nitric acid, acetic acid, etc.

WT: from -46°C or -600°C (Up to Material)



CENTRO Gost Standard Gate Valve Features

Zhejiang Centro Flow Control Co., Ltd.

+86-577-85989708

E-mail: centro@centro-flowcontrol.com

Size Range:DN50-DN500

Normal Pressure:PN16

Seal Test:1.8mpa

Body Test:2.4mpa

Suitable Temperature: Normal


Body:WCB

Bonnet:WCB

Stem:2Cr13

Material and Main Parts

No.	Parts Name	Material
1	Body	WCB
2	Disc	WCB
3	Stem	2Cr13
4	Bonnet Gasket	1Cr13+Graphite
5	Bonnet	WCB
6	Graphite Gland	Graphite
7	Pin B	35#
8	Cotter Pin	Q235
9	Seat Nut	ZCuA110Fe3
10	Plain A	45#
11	Handwheel	QT450-10
12	Lock Nut	35#
13	Bolt	35#
14	Bolt	35#
15	Washer C	Q235
16	Nut	25#
17	Gland Eyebolt	WCB
18	Stud	35#
19	Nut	25#

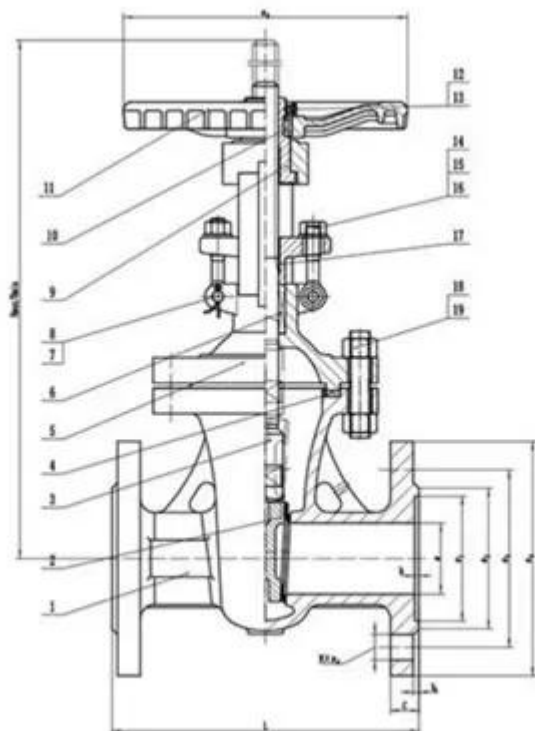

Dimensions

DN	L	D	D1	D2	b-f	ZxΦd	H
50	180	160	125	102	16-2	4xΦ18	285
80	210	195	160	133	18-2	4xΦ18	329
100	230	215	180	158	20-2	8xΦ18	390
125	255	245	210	185	22-3	8xΦ18	451
150	280	280	240	212	24-3	8xΦ18	513
200	330	335	295	268	26-3	12xΦ22	636
250	450	405	355	320	27-3	12xΦ26	739
300	500	460	410	370	27-3	12xΦ26	854